

**STANDARD FEATURES**

ITEM	DESCRIPTION
01	PRV/0.25 NPT COUPLING
02	OIL FILL/UPPER FILTER PRESS 1.0 NPT COUPLING
03	DEADBREAK 600 AMP HV BUSHING
04	LV BUSHING
05	PARKING STAND W/ STANDOFF
06	LIFTING LUGS X (4) WITH TIE-DOWN PROVISIONS
07	BOLTED COVER
08	SS 2-HOLE GROUND PADS
09	JACKING PROVISIONS
10	NAMEPLATE LASER-SCRIBED ANODIZED ALUMINUM
11	PAD MOUNTING PROVISION
12	DRAIN VALVE W/SAMPLER
13	12" REMOVABLE SILL
14	PAD LOCKABLE DOOR HANDLE, PENTA HEAD BOLT
16	REMOVABLE LV-HV BARRIER 3" FROM BASE
18	REMOVABLE TAMPER GUARD FOR COVER
21	HAND HOLE(13x22)
22	TAP CHANGER
23	COPPER X-O GROUND STRAP
24	6-HOLE NEMA SPADE
29	RADIATORS
32	BOLTED CABINET COVER
33	FIXED CABINET SIDES
36	(1) 2-POSITION LOADBREAK SWITCH
39	WEAK LINK FUSE W/ CL FUSE
41	TEMP. GAUGE
42	LIQUID LEVEL GAUGE
43	VACUUM GAUGE

**CUSTOMER APPROVAL**


FOR APPROVAL  FOR RECORDS

APPROVED AS IS \_\_\_\_\_


APPROVED AS NOTED \_\_\_\_\_

NOT APPROVED \_\_\_\_\_



- NOTES :
- 1) ALL DIMENSIONS ARE IN INCHES UNLESS NOTED
  - 2) FILLED W/MINERAL OIL
  - 3) SECOND NP LOCATED INSIDE LV DOOR
  - 3) FIXED CABINET W/ GASKET SEALED DOORS

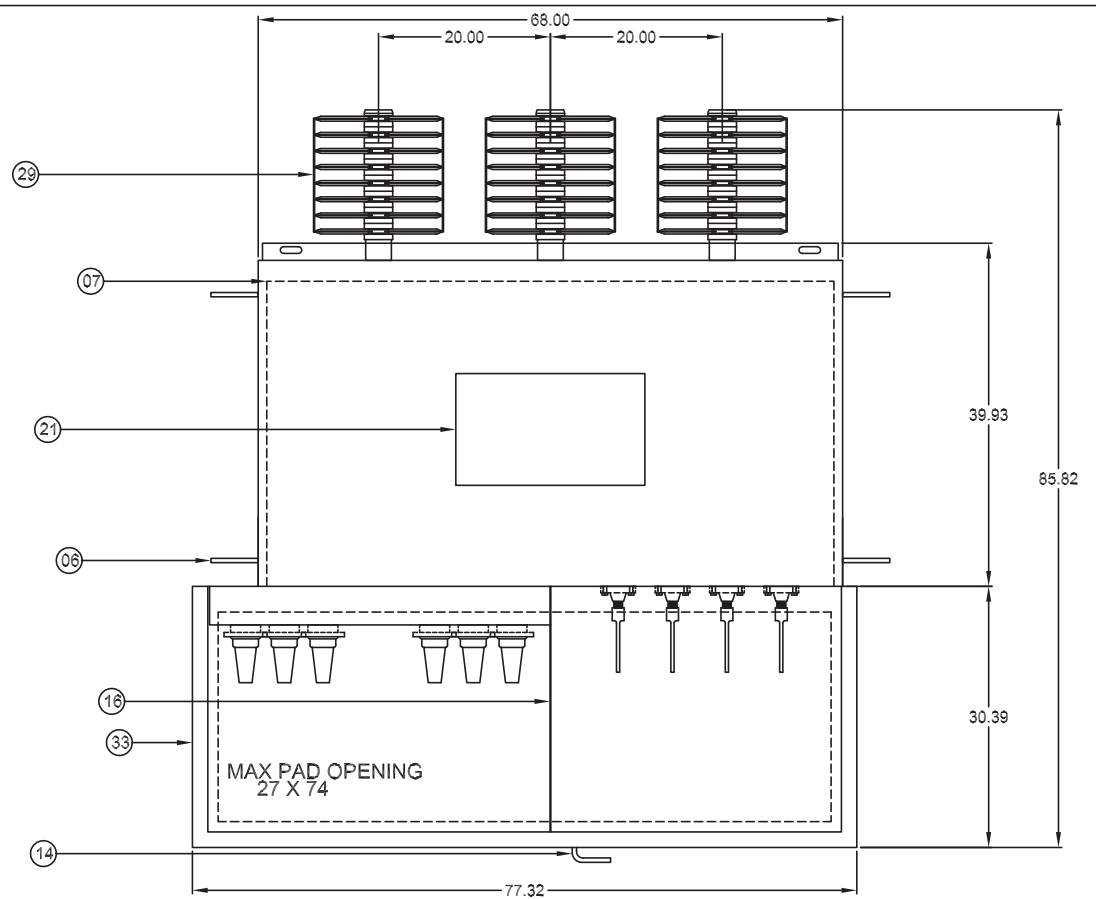

TOP VIEW WITH CABINET COVER REMOVED

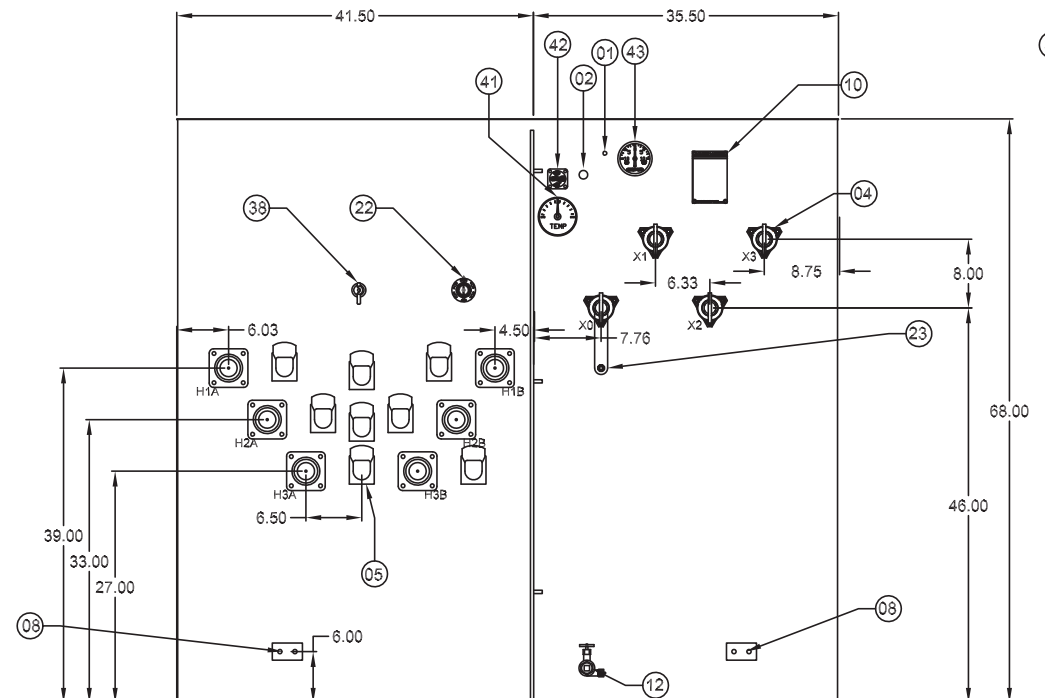

FRONT VIEW WITH CABINET REMOVED

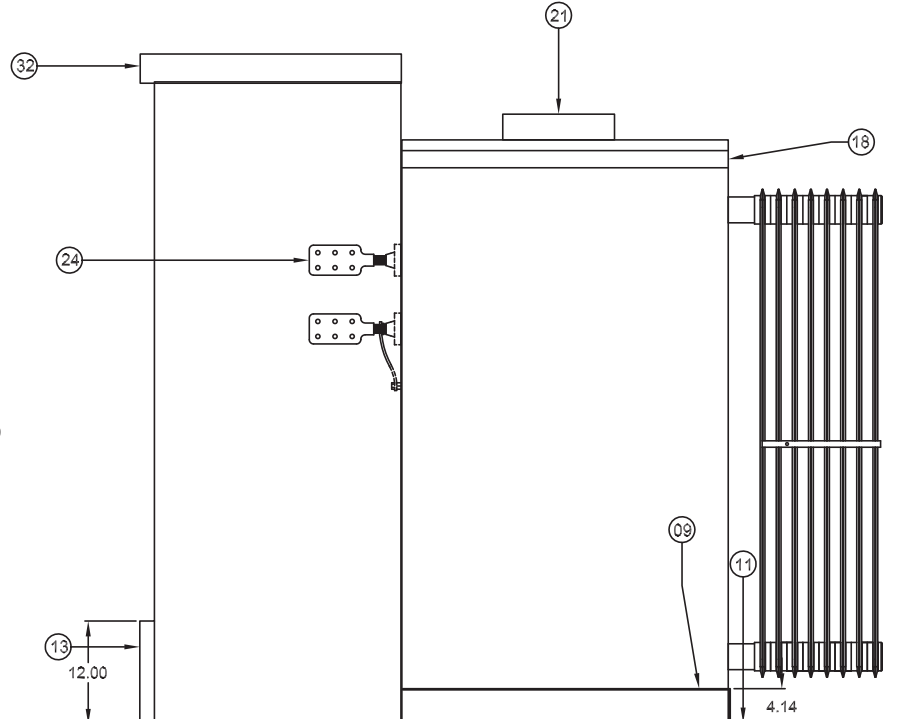

SIDE VIEW WITH CABINET DOORS AND SIDES REMOVED